


NOTE: WHEN MILLING OPERATIONS PRODUCE A ROUNDED EDGE,
THEN A SAW CUT SHALL BE USED TO MANUFACTURE
A PERPENDICULAR EDGE AS SHOWN IN THE DETAIL.
THE ENGINEER SHALL BE THE SOLE JUDGE
CONCERNING THE USE OF THIS DETAIL

BITUMINOUS DETAIL AT BUTT JOINTS

406-8

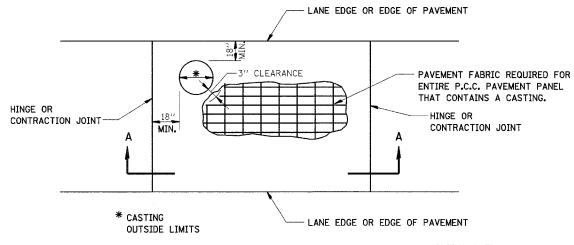

3½" COVER

GENERAL NOTES

THE CASTING SHALL BE SET TO GRADE, ANCHORED, AND INCORPORATED INTO THE P.C.C. PAVEMENT CONSTRUCTION. SEPARATE PAVEMENT BLOCKOUTS WILL NOT BE ALLOWED.

SEE STD. 420701 FOR ADDITIONAL PAVEMENT FABRIC DETAILS.

PAVEMENT FABRIC WILL BE PAID FOR SEPARATELY.
THE QUANTITY OF PAVEMENT FABRIC WILL BE
THE COMPUTED SURFACE AREA OF THE P.C.C.
PAVEMENT PANEL IN WHICH THE PAVEMENT FABRIC
IS INSTALLED. NO DEDUCTION WILL BE MADE FOR
THE CASTING AREA.

420-2

- FAP ROUTE 653 (ROUTE 18 COUPLE)
- ** SECTION (7)R, RS-2; (8)R, RS-1

CASTINGS IN P.C.C. PAVEMENT